



豪優企業有限公司

SUPER ULTRASONIC CO.,LTD

總公司：台灣新北市新莊區新樹路244巷57號

No.57,Lane 244,Hsin-Shu Road,
Hsin-Chuang Dist.,New Taipei City,24262,Taiwan

Tel: 886-2-2206 2251


Fax: 886-2-2206 2241

E-mail: super@supersonics.com.tw



www.supersonics.com.tw

Header Frame / Outer Frame roll forming machine

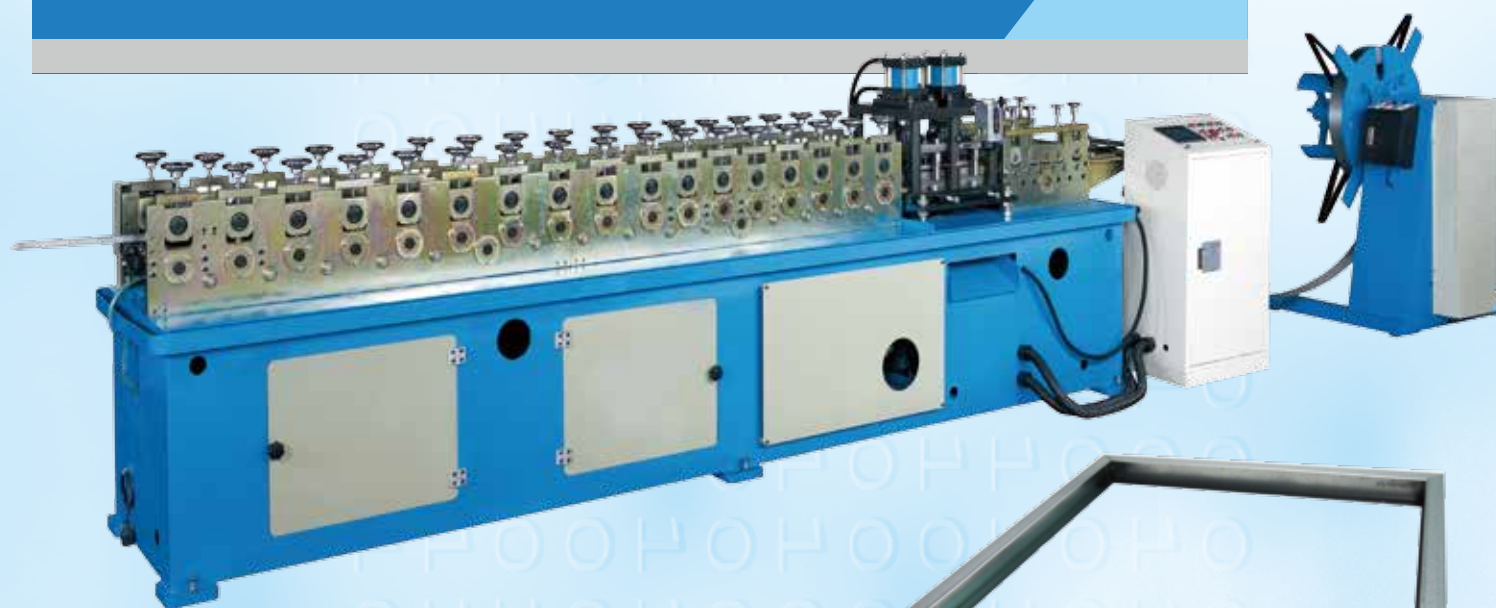

Machine Features:

The machine is designed to produce "Header frame/Outer frame" for pocket filters. You will need mouth ring machine to make a complete pocket filter.

Specification :

Line Source : 220V / 3Phase , 380V / 3Phase.

Power : 2.5KW servo motor + 3 HP Hydraulic system

Control System : HMI & PLC control panel

Measuring Accuracy : +/- 0.5mm/M

Run-Out Table : 2400mm


Feeding Speed : 20M / minute (without stop for notching and punching)

3~4 pcs / min of 600*600 frame (600mm*600mm)

Forming station : 12~16 stations (it depends on frame profile)

Transmission : Chain and Gear.

Machine Dimension : 1,115mm (Decoiler) + 4,835mm (Forming station) + 2,400 (Run out table)

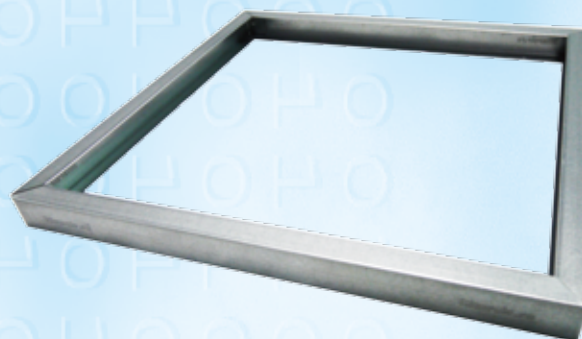

header frame 1



header frame 2